



DESIGN ENVELOPE

COMPASS high-efficiency wet-rotor circulators

CE | 2015 COMPLIANT
EEI ≤ 0.23

SOLUTION OUTLINE

FILE NO: 10.19UK
DATE: OCTOBER 2013

SUPERSEDES: 10.19UK
DATE: JULY 2013

ARMSTRONG



our choice of circulator has a surprisingly large effect on your building project.

The right circulator will generate energy savings for years. Advanced variable speed technology increases circulator efficiency; even though the circulator and motor are small, the energy savings can add up. Homeowners will appreciate the reduced operating costs and reduced carbon footprint.

For contractors, a well-designed circulator is easy to install and will reduce or eliminate customer complaints. For wholesalers and contractors, a circulator that covers a broad range of operating requirements makes the selection process easier, leaving more time for serving customers.

Inventory costs are also important. The right choice of circulator lets you serve more customers and installations with only one model. Keeping fewer circulator models on your shelf, or in your trucks, cuts your inventory investment and your operating costs.

ENERGY SAVINGS

UP TO 70%




Easy access for wiring the terminal block

FOR DETAILS ON

- Design Envelope selections
- Demand-based variable speed operation
- Sensorless technology

please see the [Design Envelope solution outline](#)
(FILE NO. 100.11)



DESIGN ENVELOPE

Design Envelope is a revolutionary technology pioneered by Armstrong that offers simplified circulator selection, lowest installed cost, expanded application flexibility and optimised energy efficiency. Armstrong Design Envelope technology, previously offered in Armstrong pumps from one horsepower to 350 kW, is now available in Armstrong circulators. Design Envelope technology augments the value of Armstrong circulators through increased operating range and sensorless, demand-based control.

KEY BENEFITS

Responding to the need for a better circulator, Armstrong offers COMPASS, an advanced solution that benefits everyone involved in a heating system project. By selecting the right circulator, wholesalers, homeowners, and contractors can all come out ahead.

COMPASS circulators incorporate advanced functionality to assist with your construction and service projects and improve the long-term enjoyment of the building spaces you help create.


Easy sizing and selection of the COMPASS circulator simplifies your job as a wholesaler or contractor and reduces your inventory requirements.

In the field, the front mounted terminal block reduces installation time.

The COMPASS “auto” algorithm intelligently adapts to system demand, so you get the right setup every time and your customers enjoy comfortable room temperatures.

Ultimately, COMPASS circulators provide reliable performance, backed by a two-year warranty, with noticeable reductions in energy consumption and operating costs.

KEY FEATURES

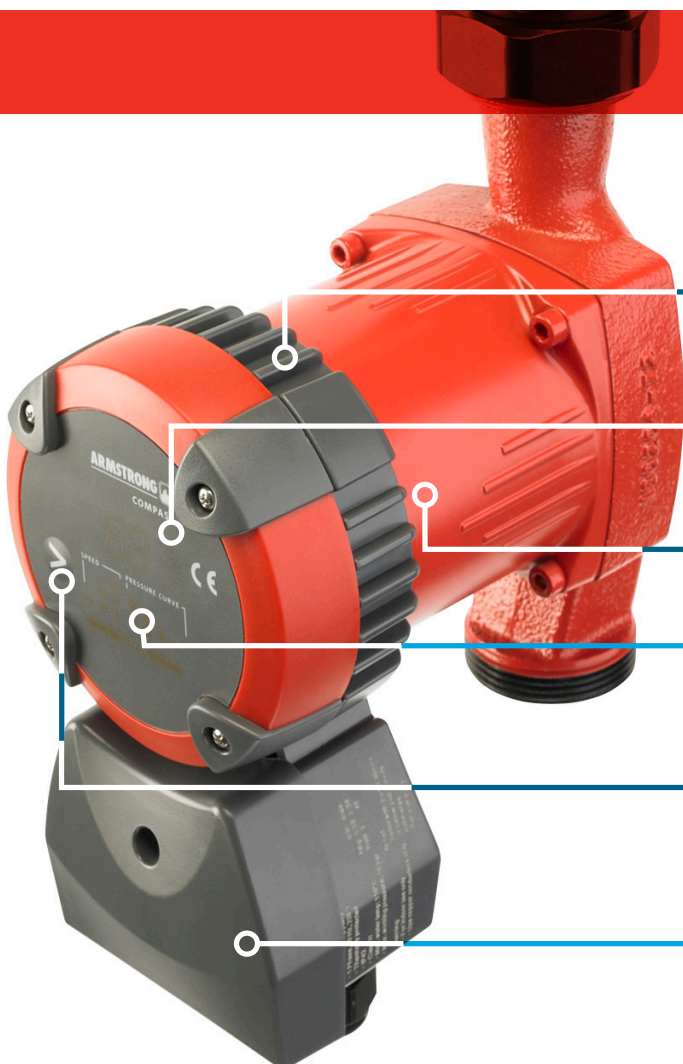

Broad operating range, producing up to 6 meters of head and 4.5 m³/h flow

Design Envelope technology providing sensorless demand-based control

Efficient motor technology and intelligent variable speed operation

Easy to read display

Eight different modes of operation providing versatility to cover the performance of a wide range of fixed speed circulators

Large wiring chamber and front-mounted terminal block

PERFORMANCE

POWER RANGE	5W-45W
MAX FLOW RATE	4.5 m ³ /h
MAX HEAD PRESSURE	6 m
MATERIALS/ PART NUMBER	CAST IRON STAINLESS STEEL

MANCHESTER

WENLOCK WAY
MANCHESTER
UNITED KINGDOM
M12 5JL
+44 (0) 8444 145 145

BIRMINGHAM

HEYWOOD WHARF, MUCKLOW HILL
HALESOWEN, WEST MIDLANDS
UNITED KINGDOM
B62 8DJ
+44 (0) 8444 145 145

TORONTO

23 BERTRAND AVENUE
TORONTO, ONTARIO
CANADA
M1L 2P3
+1 416 755 2291

BUFFALO

93 EAST AVENUE
NORTH TONAWANDA, NEW YORK
U.S.A.
14120-6594
+1 716 693 8813

BANGALORE


#59, FIRST FLOOR, 3RD MAIN
MARGOSA ROAD, MALLESWARAM
BANGALORE, INDIA
560 003
+91 (0) 80 4906 3555

SHANGHAI

NO. 1619 HU HANG ROAD, XI DU TOWNSHIP
FENG XIAN DISTRICT, SHANGHAI
P.R.C.
201401
+86 21 3756 6696


ARMSTRONG FLUID TECHNOLOGY
ESTABLISHED 1934

COMPASS PERFORMANCE CURVES

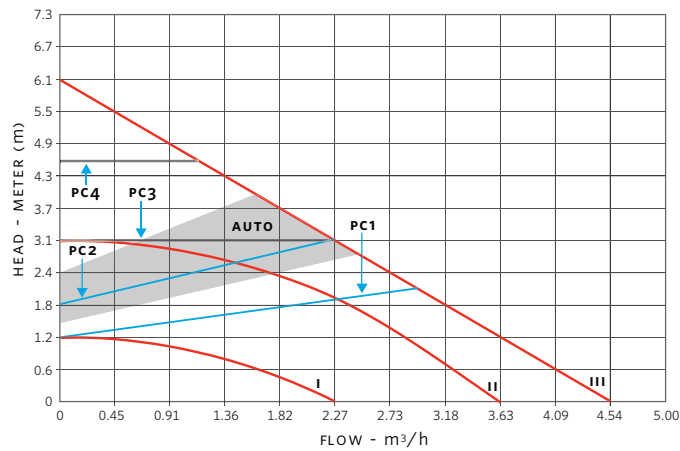

EIGHT MODE OPTIONS

- AUTO** Circulator adapts to system demand over time.
- PC1** Lowest proportional-pressure curve
- PC2** Highest proportional-pressure curve
- PC3** Lowest constant-pressure curve
- PC4** Highest constant pressure curve
- III** Highest constant speed
- II** Medium constant speed
- I** Lowest constant speed



A = 130mm/180mm
B = 180mm
C = 135mm

For more information, contact your Armstrong representative or visit us at:
armstrongfluidtechnology.co.uk

MAKING ENERGY MAKE SENSE™

ARMSTRONG FLUID TECHNOLOGY.CO.UK